


Seria Mixte

Concepute pentru utilizare
intensa in santiere



Panou
de
control

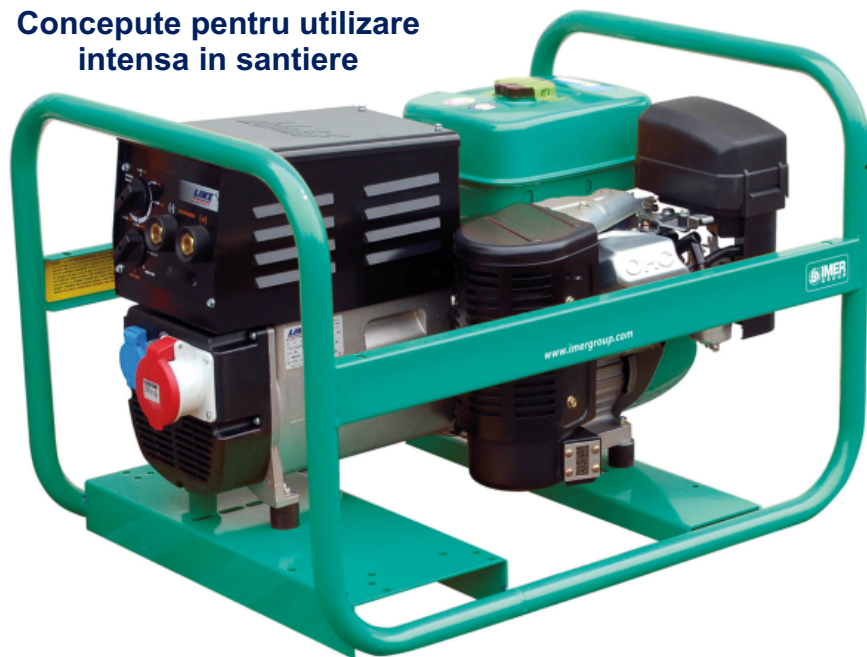

Echipare optionala:

- Varianta XL = rezervor marit
- Varianta DE = demaraj electric
- Varianta N/S = pornire automata
- Regulator de tensiune electronica AVR
- Pornire la cheie
- Pornire automatizata
- Kit diferential 30 mA + priza impamantare
- Kit roti
- Kit intretinere (filtre + ulei)

Echipare standard:

- Racire cu aer (filtru inclus)
- Senzor lipsa ulei (ce opreste functionarea motorului)
- 2 prize 220V / 50Hz Ip44 10/16A Schuko
- Protectie prize cu disjuncteur termic
- Pornire manuala la sfoara
- Cadru ranforsat cu diam. 30 mm

Servicii incluse:



Seria Mixte	4500 EX	5000 DXL15	5000 DXL YN DE	7000 EX
Putere maxima 230V	5.4 kVA	6.5 kVA	6.5 kVA	7.5 kVA
	4.3 kW	5.15 kW	5.15 kW	6.0 kW
In regim continuu	3.25 kW	4.5 kW	4.5 kW	4.5 kW
Frecventa	50 Hz	50 Hz	50 Hz	50 Hz
Intensitate	50 - 180 A	60 - 180 A	60 - 180 A	60 - 200 A
Diametru electrod	Ø 3.2 mm	Ø 4 mm	Ø 4 mm	Ø 5 mm
Tip motor	Subaru EX27	Subaru DY 42	Yanmar L100	Subaru EX40
Putere motor	9 cp	9.4 cp	9.3 cp	14 cp
Combustibil	Benzina	Motorina	Motorina	Benzina
Capacitate rezervor	6.1 l	15 l	15 l	7 l
Autonomie	3h	10h 30 min.	9h 45 min.	2h 10 min.
Zgomot (la 7m)	72 dB(A)	84 dB(A)	78 dB(A)	72 dB(A)
Putere sonora	97 Lwa	109 Lwa	103 Lwa	97 Lwa
Greutate	74 kg	109 kg	109 kg	91 kg
Dimensiuni L/I/h (mm)	765/570/520	910/490/610	875/535/635	855/555/542

Distribuitor local